


MOUNTING CONFIGURATION

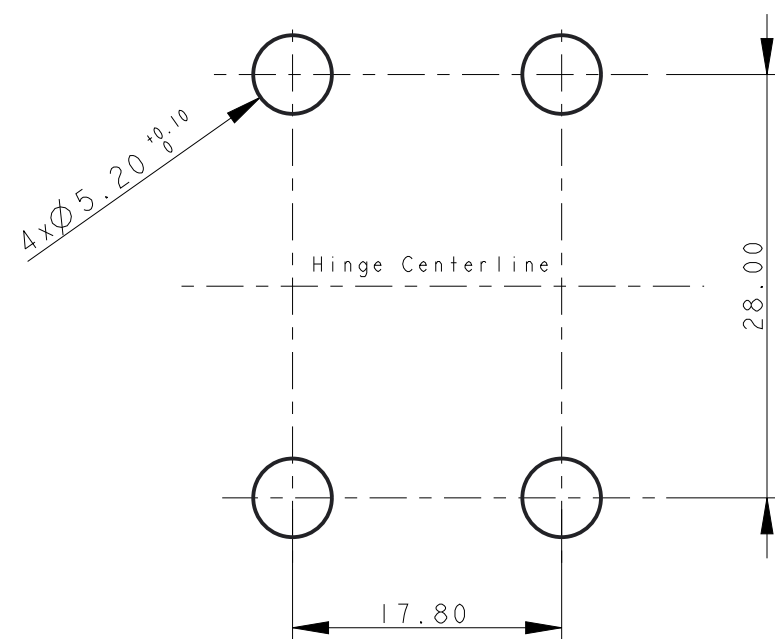

NOTES:

1. TORQUE RATINGS, Nm :

PART NUMBER	SYMMETRIC TORQUE
QM10S-1038-00	0.0
QM10S-1038-10	1.0
QM10S-1038-20	2.0
QM10S-1038-30	3.0
QM10S-1038-40	4.0
QM10S-1038-50	5.0

2. CYCLE LIFE:

WITHIN 25,000 CYCLES STATIC TORQUE STAY WITHIN $\pm 25\%$ OF TORQUE SPECIFICATION.

3. FINISH: NATURE

4. 270 DEGREE SHAFT ROTATION

5. OIL RING SEALS FOR PROTECTION AGAINST ENVIRONMENT CONTAMINATION

6. MATERIAL:

STAINLESS STEEL, STEEL, GREASE AND O-RING

METRIC(MM)	[ENGLISH] (IN)	LEEEO		DWG NO.	
0-3 ± 0.15	0-0.118 ± 0.006			QM10S-1038-xx	
3-10 ± 0.20	0.118-0.394 ± 0.008	TITLE			
10-30 ± 0.25	0.394-1.181 ± 0.010	QM10S			
30-50 ± 0.30	1.181-2.000 ± 0.012	APPROVED	DRAWN	MATERIAL	
50-100 ± 0.40	2.000-4.000 ± 0.016	JLIU	BCHEN	SEE NOTES	
100-200 ± 0.50	4.000-8.000 ± 0.020	SHEET 1 OF 1		SCALE: 2.500	REV
PROPRIETY ITEM - ALL INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS PATENT AND OTHERWISE ARE RESERVED BY LEEEO TECHNOLOGIES CORPORATION		A3			