

NOTES:

1. TORQUE RATINGS, Nm:

PART NUMBER	SYMMETRIC TORQUE
TIPI0-1060-10	1.0
TIPI0-1060-20	2.0
TIPI0-1060-30	3.0
TIPI0-1060-40	4.0
TIPI0-1060-50	5.0

2. CYCLE LIFE:


WITHIN 25,000 CYCLES STATIC TORQUE STAY WITHIN ±20% OF TORQUE SPECIFICATION.

3. FINISH: PLAIN AND PLATING

4. 360 DEGREE SHAFT ROTATION

5. DESIGNED TO BE OVER MOLDED IN GLASS FILLED ENGINEERING PLASTIC.

6. DO NOT PREHEAT TORQUE INSERT.

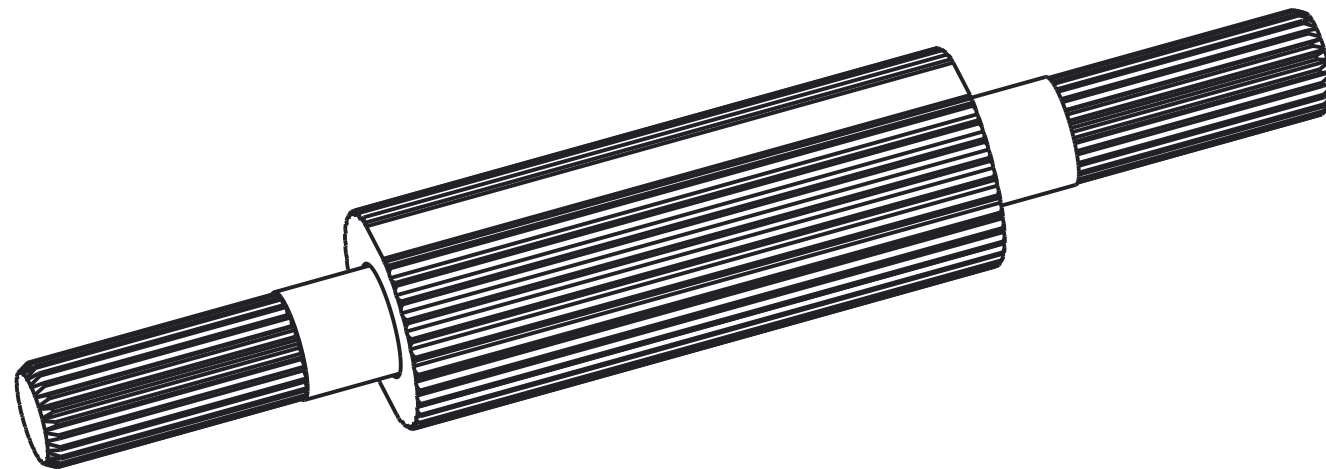

METRIC	(ENGLISH)	LEEEO		DWG NO.	
0-3 < ±0.10	0-0.118 < ±0.004			TIP10-1060-xx	
3-10 < ±0.13	0.118-0.394 < ±0.005	TITLE			
10-30 < ±0.25	0.394-1.181 < ±0.010	TORQUE INSERT			
30-50 < ±0.30	1.181-2.000 < ±0.012	APPROVED	DRAWN	MATERIAL	
50-100 < ±0.40	2.000-4.000 < ±0.016	JLIU	DLEE	STEEL	
100-200 < ±0.50	4.000-8.000 < ±0.020			REV	A3
PROPRIETY ITEM - ALL INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS PATENT AND OTHERWISE ARE RESERVED BY LEEEO TECHNOLOGIES CORPORATION		SHEET 1 OF 1	SCALE: 3.000		